

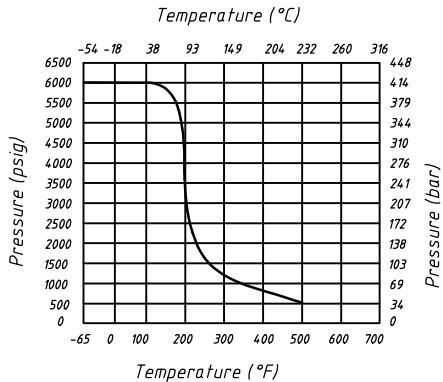



Valve Features	
Maximum working pressure	6000 psig (4.14bar)
Working temperature	-54 °C~232 °C
Orifice	0.16in.(4.0mm)
CV	0.35

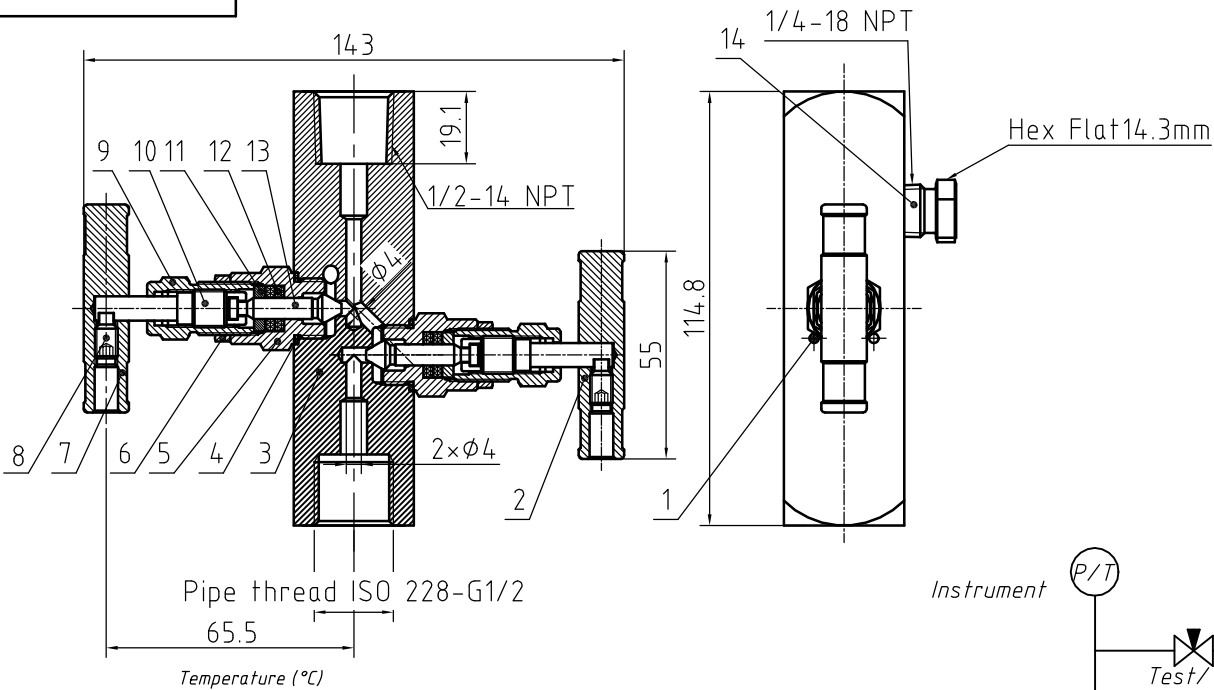

NOTE:1. Dimensions for reference only.
2. Materials:316L/A479.
3. RG Thread Standard:ISO 228,JIS B0202.

IDX	Designation	Materials
1	Set Screw	Carbon Steel
2	Handle	Aluminum Oxide
3	Body	316L/A479
4	Gland	316L/A479
5	Bonnet	316L/A479
6	Lock Nut	316L/A479
7	Handle	Aluminum Oxide
8	Set Screw	Stainless Steel
9	Packing Bolt	316L/A479
10	Upper Stem	316L/A479
11	Gland	316L/A479
12	Packing	PTFE
13	Lower Stem	316L/A479
14	Thread plug	316L/A479

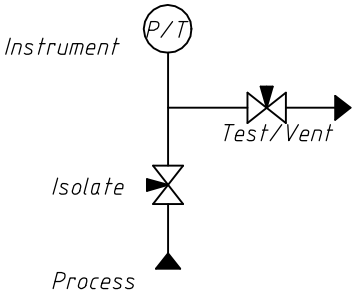

Linear unit of size: mm			2-Valve Manifold			HTA-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
signature	date					
design			versions	1	proportion	1:2
audit						V2N-2-F-8GGN-S
ratify						
			Page 1/1			