
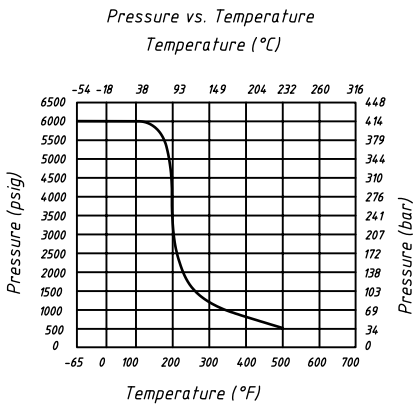


Valve Features	
Maximum working pressure	6000psig
Working temperature	-54℃~232℃
Orifice	4.0mm
Cv	0.35

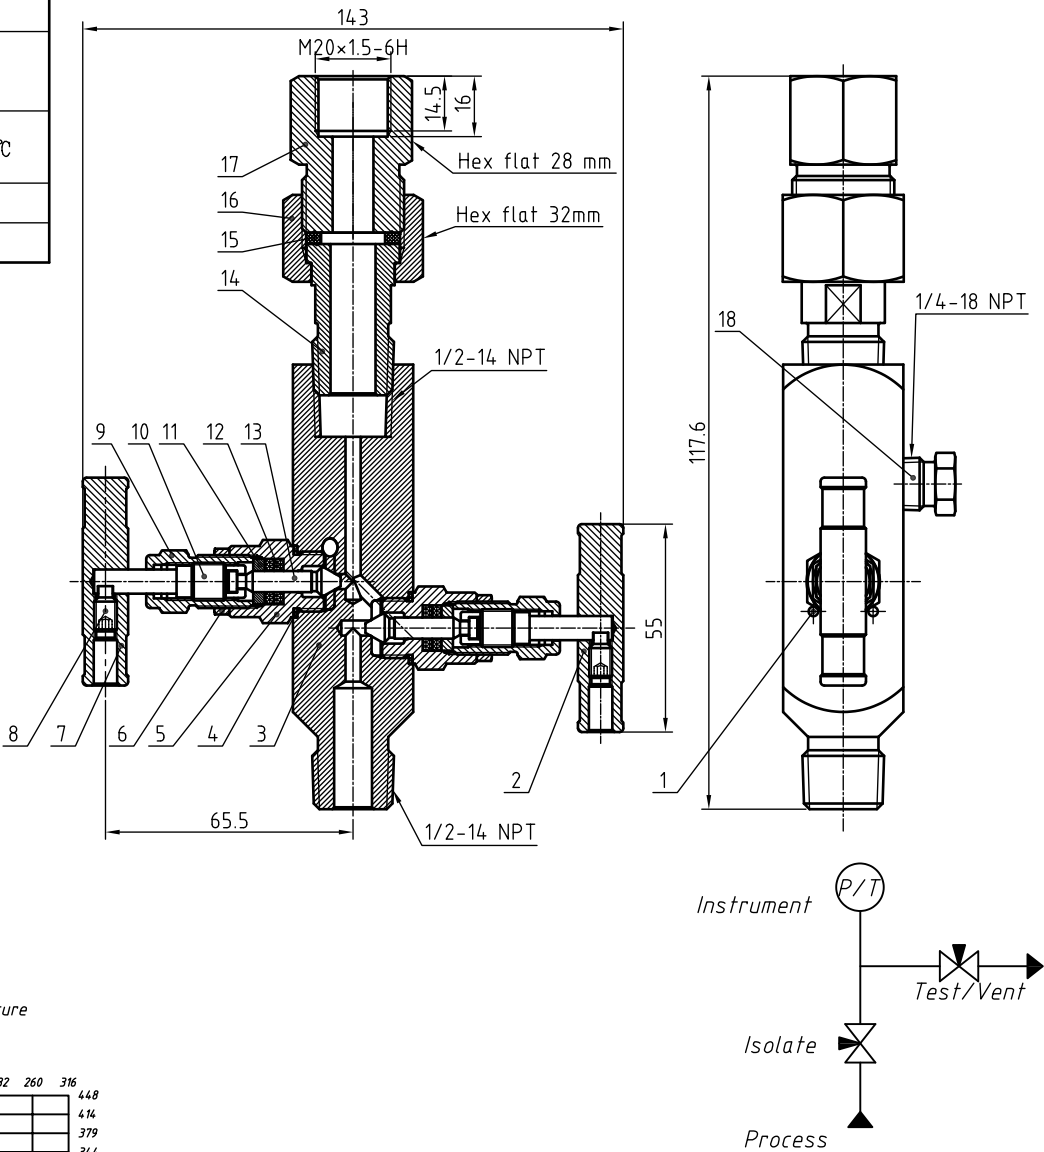

NOTE: Dimensions for reference only.

IDX	Designation	Materials
1	Lock Pin	Stainless Steel
2	Handle	Anodised Aluminum
3	Body	316 L/A4 79
4	Gland	316 L/A4 79
5	Bonnet	316 L/A4 79
6	Lock Nut	316 L/A4 79
7	Handle	Anodised Aluminum
8	Set Screw	StainleL Steel
9	Packing Bolt	316 L/A4 79
10	Upper Stem	316 L/A4 79
11	Gland	316 L/A4 79
12	Packing	PTFE
13	Lower Stem	316 L/A4 79
14	Short Pipe	316 L/A4 79
15	Washer	PTFE
16	Nut	316 L/A4 79
17	Reducing Bushing	316 L/A4 79
18	Thread plug	316 L/A4 79

Linear unit of size: mm			2-Valve Manifold			HTA-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС
	signature	date				
design			versions	1	proportion	1:2
audit						V2N-2-MS-8N20M15-S
ratify						
			Page 1/1			