
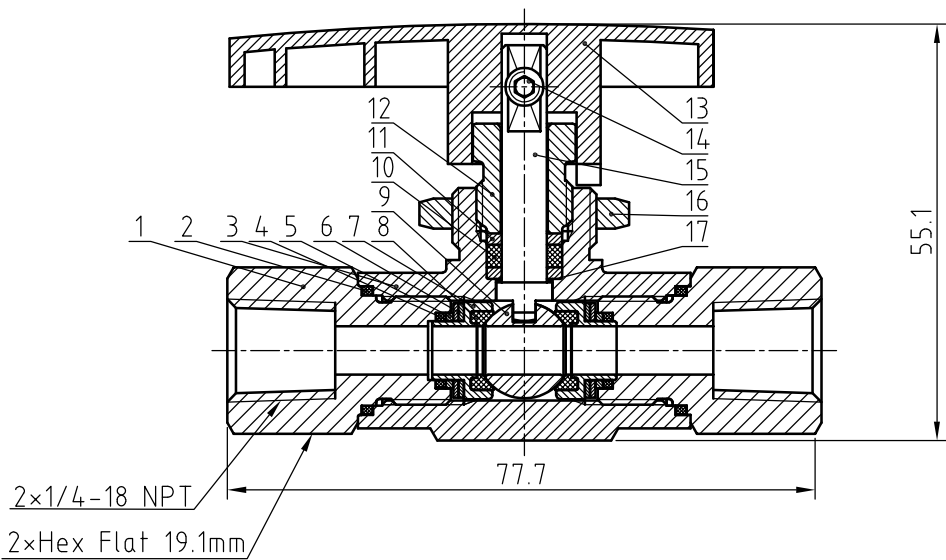


Valve Features	
Maximum working pressure	6000 psig (414bar)
Working temperature	-54°C~232°C
Orifice	0.25in.(6.4mm)
Cv	2.34



Item	Component	Material
1	End Connection	316 L/A479-NACE
2	Connection O-ring	PTFE
3	Body	316 L/A479-NACE
4	Seat Retainer Backup Ring	PTFE
5	Seat Retainer Guide	316 L/A479
6	Seat Spring	Alloy X-750
7	Seat Retainer	316 L/A479-NACE
8	Seat	PEEK
9	Ball	316 L/A479-NACE
10	Stem Packing	PTFE
11	Stem Washer	316 L/A479-NACE
12	Packing Nut	316 L/A479
13	Handle	Nylon
14	Set Screw	316 L/A479
15	Stem	316 L/A479-NACE
16	Panel Nut	316 L/A479
17	Stem Back-up Ring	PEEK

Linear unit of size: mm			Ball Valves			НТА-ПРОМ ТЕХНОЛОГИИ РЕШЕНИЯ СЕРВИС	
	signature	date	versions	1	proportion	1:1	BVN9-2B-F-4N-PK-SG-S
design							
audit				Page 1/1			
ratify							

NOTE:Dimensions for reference only.

NOTE:Dimensions for reference only.